




(!) Caution: Please disassemble all factory pre-assembled parts and re-assemble using high quality thread lock.

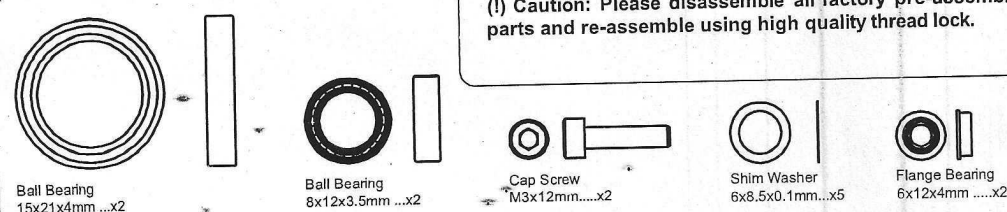


(!) Caution:


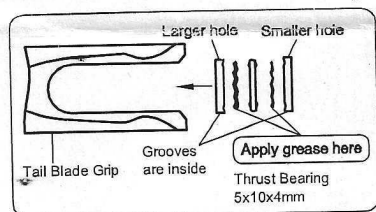


(!) Caution:

Use medium strength thread lock compound on all screws

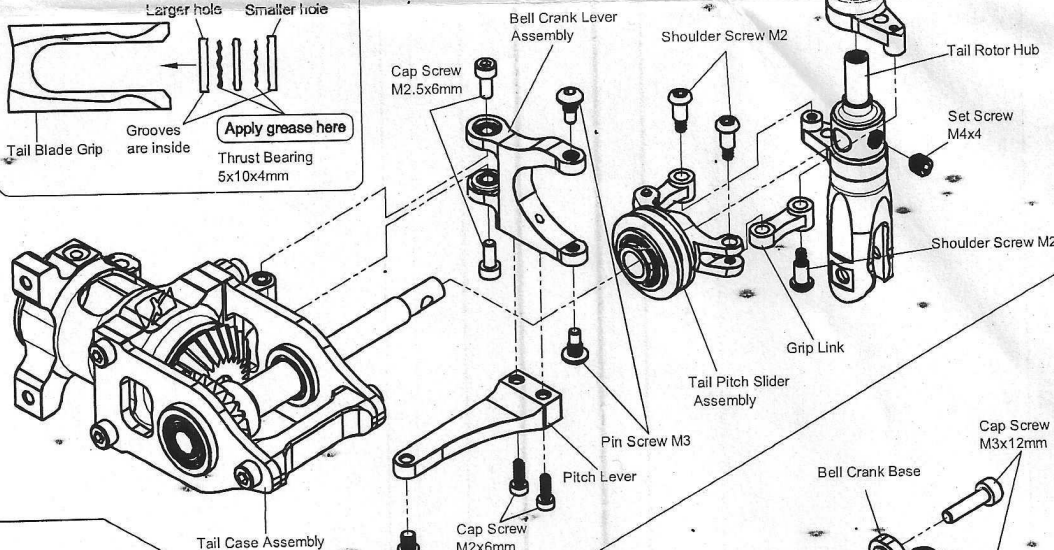

TAIL PITCH SLIDER ASSEMBLY

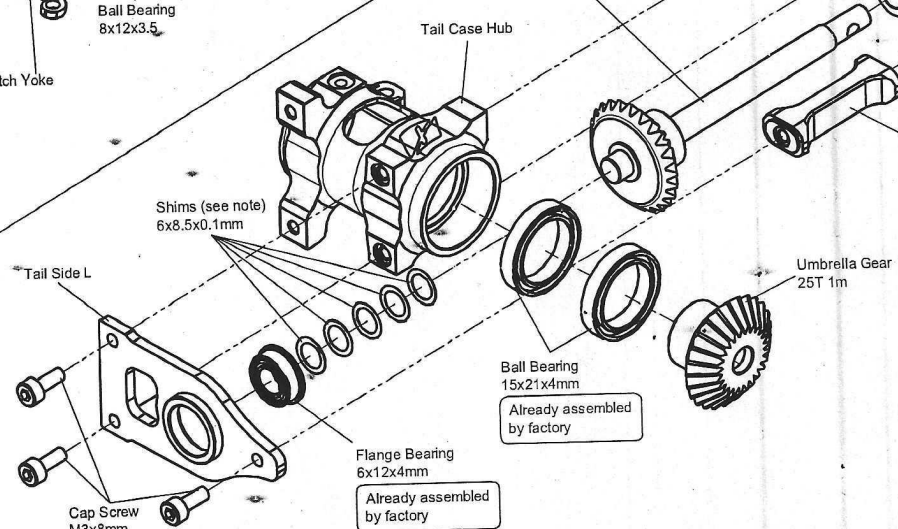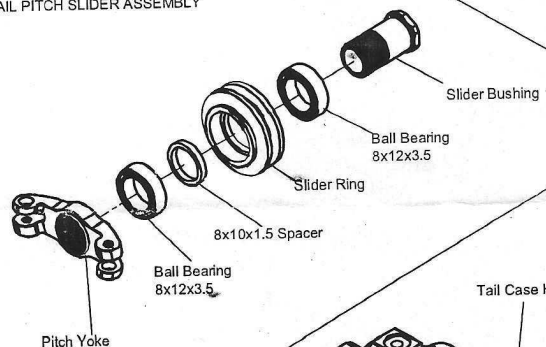

Note: We supply a total of 5 0.1mm shim washers. 1 to 3 are normally included in the pre-assembly, and the remainder in a separate bag. These shims can be used on either side of the tail shaft assembly to fine tune the gear mesh.

TAIL CASE ASSEMBLY